


2872-RH Roller Clutch 2872-LH Roller Clutch

The Tiny-Clutch 2872 overrunning roller clutch is a miniature roller and cam type one-way clutch from our D-Series line of clutches. The D-Series clutches are most frequently used to allow a driven member to overrun the input, or for backstopping a load, they can also function to convert oscillating motion to rotary motion. These clutches use our proven cam and roller principle for long life with trouble free performance. The cam, housing and rollers are made of hardened steel and each roller is energized by a spring which is held square and centered in a drilled pocket. The design of the clutch allows for near zero backlash as well as high free-wheeling speeds. The clutch will not jam in the free direction.

The 2872 overrunning roller clutch is based on our D93A roller clutch. The knurled hub on the housing allows installation of a pulley, gear or sprocket. This clutch has a 3/8 inch (9.5mm) bore, the cam is screwed and/or pinned to your shaft, and power may be applied to the clutch through either the housing or the cam. These clutches can be used for many different applications and are the original equipment clutches for multiple brands of hot stamping machines.

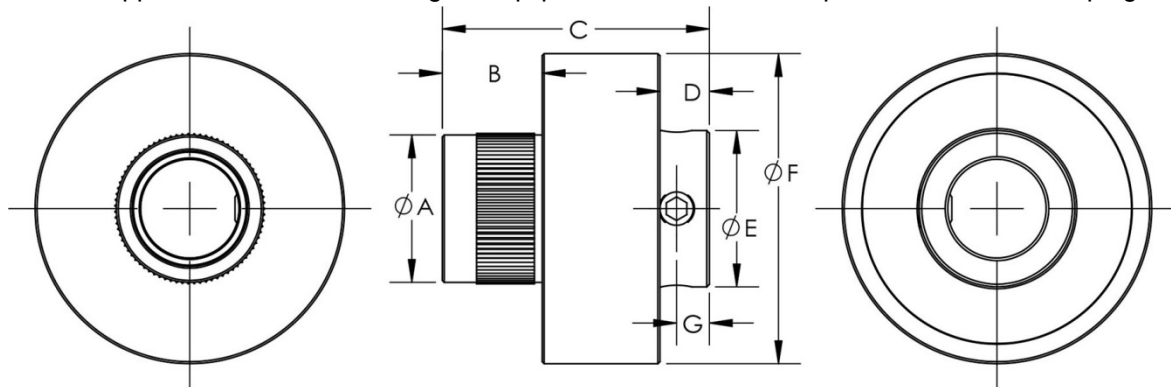

Specifications:

Maximum Torque	15lbs-in 1.7Nm	Dimension B	.38in 9.7mm	Dimension E	.59in 15.1mm
Maximum Speed	5,000 RPM	Dimension C	1.02in 25.8mm	Dimension F	1.18in 29.9mm
Typical Weight	2.0oz 57g	Dimension D	.19in 4.8mm	Dimension G	.13in 3.2mm
Dimension A	.56in 14.2mm				

Mounting Specifications:

Bore	Set Screw	Cross Hole
3/8in 9.5mm	8-32	3/32in 2.4mm

Clutch Direction:

Right handed clutches drive clockwise and slip counter clockwise.
 Left handed clutches drive counter clockwise and slip clockwise.

We can provide a variety of adapter hubs or make one to your specifications to connect our clutch to your application.

